


SI 200



Feature

- Wall or Rail mounting type
- Hold Function : Sample, Average, Peak
- RS232C & RS485 interface(User Selectable)

Physical Dimension [Unit:mm]

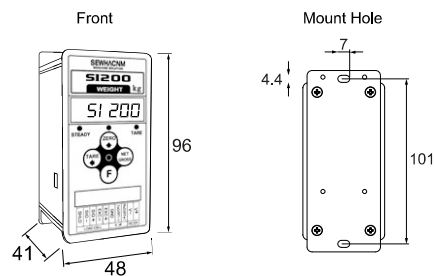


SI 480E



Feature

- User custom setting : External input
- Hold Function : Sample, Average, Peak
- MODBUS(RTU) protocol

Physical Dimension [Unit:mm]

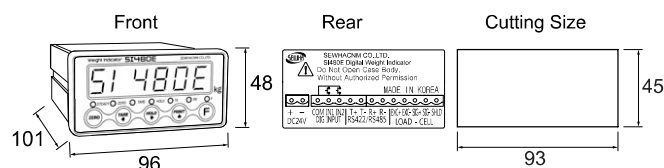

		SI 200	SI 480E
ANALOG PART	Input Sensitivity	Min. 0.1 μ V / Digit	
	Load Cell Excitation	DC 5V	
	Non-Linearity	0.001% of Full Scale	
	Input Signal	Max 3.0 mV/V	
	A/D Sampling	Max 120time/sec, Sigma-Delta	
	Resolution	Internal : 1/1,000,000 Display : 1/20,000	
DISPLAY PART	Main Display	7 Segment, 6 Digit Red FND, H= 7.6 mm	7 Segment, 6 Digit Red FND, H= 16.2 mm
	Under Zero	Minus(-) Display	
	ϕ 2 LED	STEADY, ZERO, TARE, RTxD	STEADY, ZERO, TARE, HOLD, Tx, Rx, F
GENERAL PART	Power Supply	DC12~24V	DC12~24V, 8W (SMPS) Free Voltage(AC 100V~240V, 50/60Hz)
	Operating Condition	Temperature: -10°C~+40°C, Humidity: Under 85% RH	
	Size/Weight	(W)48 x (H)96 x (D)41 mm / 140g	(W)96 x (H)48x (D)135 MM / Weight: 1.0kg
	Interface	RS232C / RS485 (User Selection)	Standard: RS422 & RS485, Special order: RS232C
	External Input	NONE	2EA
	Key pad	ZERO, TARE, F.NET/GROSS	NONE
	Relay Output	NONE	
	Option	NONE	